

ELECTRICAL EQUIPMENT 04/08

MINI RESIN SPOT LIGHT AC



✓ Technical features

- High quality, super bright underwater LED lamps
- Ideal for swimming pools and water features
- 100% waterproof – lamp filled with epoxy resin
- Acid-proof, alkali-proof and UV resistant
- Low power consumption with long-term stability
- Supports 16 colour changing programs
- Remote control and amplifier available on request




RC-11 REMOTE CONTROL & CONTROLLER



RC-12 REMOTE CONTROL & CONTROLLER

📏 Dimensions

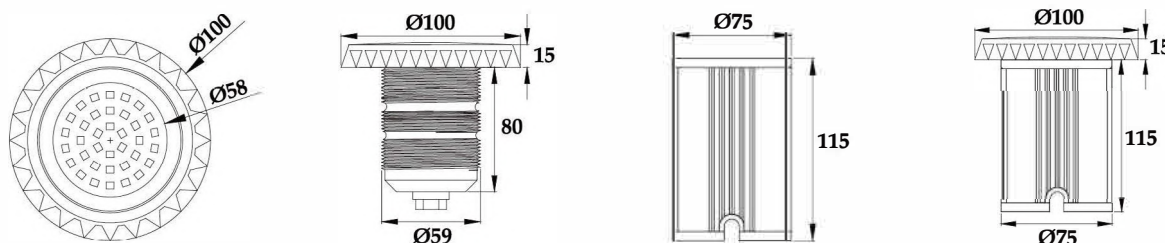

🔍 Models

PRODUCT CODE	COLOR	LED	LUMEN	WATT	VOLTAGE	PACKING	WEIGHT kg	VOLUME m ³
E-300-W	White	99	700	7W	12 V AC	1	0.805	0.061
E-300-WW	Warm white	99	700	7W	12 V AC	1	0.805	0.061
E-300-RGB	RGB	99	300	6W	12 V AC	1	0.805	0.061
RC-11	Controller and remote control (Input/output 220V-240V AC 600 WATT)					1	0.2	0.0009
RC-12	Wifi controller and remote control (Input/output 220V-240V AC 600 WATT)					1	0.2	0.0009

ELECTRICAL EQUIPMENT 04/09

MINI RESIN SPOT LIGHT DC



✓ Technical features

- High quality, white polycarbonate underwater LED lights
- Remote control and amplifier available on request
- Multiple colour programs available
- Protection rating: IP68




AMPLIFIER




REMOTE CONTROLLER

📏 Dimensions

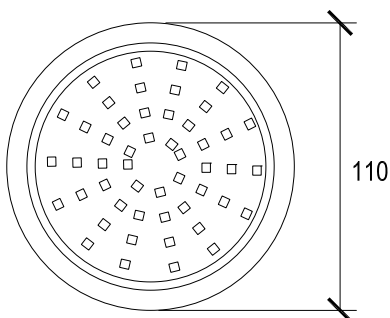

🔍 Models

PRODUCT CODE	COLOR	LED	LUMEN	WATT	VOLTAGE	PACKING	WEIGHT kg	VOLUME m ³
E-305-W	White	153	1130	15 W	12 V DC	1	0.3	0.01
E-305-WW	Warm white	153	1150	15 W	12 V DC	1	0.3	0.01
E-305-RGB	RGB	153	580	15 W	12 V DC	1	0.3	0.01
RC-03	Controller and remote controller (5-24 V DC INPUT-OUTPUT 11.66A 140 WATT)					1	0.40	0.0014
RC-04	Amplifier 140 Watt					1	0.20	0.0006



ELECTRICAL EQUIPMENT 04/11

ABS WALL MOUNTED FLAT LIGHT




Technical features

- Made of high quality ABS plastic
- Wall mounted, underwater light for concrete pools
- Halogen bulb 100W-12V AC
- Includes 2.5m underwater cable (H07RN-F 2x1.5)
- Includes 1m of flexible conduit hose
- Tempered protection glass
- UV protection
- Easy to install and simple to service
- Protection rating: IP68
- Optional extras: Protection glass also available in yellow, orange, red, green and blue, and cable can be supplied at different lengths on request



Dimensions



Models

PRODUCT CODE	DESCRIPTION	SPOT	PACKING	WEIGHT kg	VOLUME m ³
WLP-100	ABS Underwater Halogen light	100WATT-12V AC	6	1.06	0.07
SSRIM08	Stainless steel AISI 316L V4A rim	-	-	-	-

ELECTRICAL EQUIPMENT 04/12

LARGE ABS LED FLAT LIGHT AC





Technical features


- High quality, super bright underwater LED lamps
- Suitable for concrete or liner swimming pools
- Easy to install (Installation kit not included)
- 100% waterproof – lamp filled with epoxy resin
- Acid-proof, alkali-proof and UV resistant
- Low power consumption with long-term stability
- Controller supports 16 colour changing programs
- Includes 4m cable length (H07RN-F 2x1.0 2mm)
- Can be installed in PAR56 light housing with additional fixtures
- Protection rating: IP68



Dimensions



RC-11
REMOTE CONTROL &
CONTROLLER



RC-12
REMOTE CONTROL &
CONTROLLER



Models

PRODUCT CODE	LUMEN	COLOR	LED	WATT	Ø mm	PACKING	WEIGHT kg	VOLUME m ³
E-108-252-RGB	1350	RGB	252	18	230	1	1.34	0.0051
E-108-252-W	2100	White	252	21	230	1	1.34	0.0051
E-108-252-WW	2100	Warm white	252	21	230	1	1.34	0.0051
E-108-531-RGB	1650	RGB	531	33	230	1	1.34	0.0051
E-108-531-W	3600	White	531	36	230	1	1.34	0.0051
E-108-531-WW	3600	Warm white	531	36	230	1	1.34	0.0051
RC-11	Controller and remote control (Input/output 220V-240V AC 600 WATT)					1	0.2	0.0009
RC-12	Wifi controller and remote control (Input/output 220V-240V AC 600 WATT)					1	0.2	0.0009

ELECTRICAL EQUIPMENT 04/13


SMALL ABS LED FLAT LIGHT AC



✓ Technical features

- High quality, super bright underwater LED lamps
- Suitable for concrete or liner swimming pools
- Easy to install (Installation kit not included)
- 100% waterproof – lamp filled with epoxy resin
- Acid-proof, alkali-proof and UV resistant
- Low power consumption with long-term stability
- Controller supports 16 colour changing programs
- Includes 4m cable length (H07RN-F 2x1.0 2mm)
- Protection rating: IP68

📏 Dimensions



RC-11 REMOTE CONTROL
& CONTROLLER



RC-12 REMOTE CONTROL
& CONTROLLER



🔍 Models

PRODUCT CODE	LUMEN	COLOR	LED	WATT	Ø mm	PACKING	WEIGHT kg	VOLUME m ³
E-107-252-W	2100	White	252	21	152	1	0.87	0.045
E-107-252-WW	2100	Warm white	252	21	152	1	0.87	0.045
E-107-252-RGB	1350	RGB	252	18	152	1	0.87	0.045
RC-11	Controller and remote control (Input/output 220V-240V AC 600 WATT)					1	0.2	0.0009
RC-12	Wifi controller and remote control (Input/output 220V-240V AC 600 WATT)					1	0.2	0.0009
E-108KIT	Installation kit for liner pool					1	0.2	0.01

ELECTRICAL EQUIPMENT 04/14


BIG ABS LED RESIN FLAT LIGHT DC



✓ Technical features

- Made of high quality ABS plastic
- 100% waterproof resin-filled underwater lamp
- Size: 260mm x 40.5mm
- Certification: CE and ROHS
- Protection rating: IP68
- Warranty: 2 years

📏 Dimensions

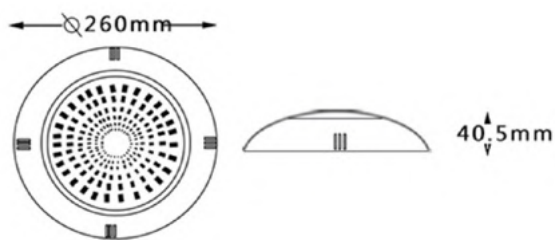

AMPLIFIER
RC-04



REMOTE CONTROLLER RC-03

🔍 Models

PRODUCT CODE	LUMEN	COLOR	LED	WATT	Ø mm	PACKING	WEIGHT kg	VOLUME m³
E-131-252-RGB	900	RGB	252	18	260	1	1.5	0.0052
E-131-252-W	2100	White	252	18	260	1	1.5	0.0052
E-131-252-WW	2100	Warm white	252	18	260	1	1.5	0.0052
E-131-441-RGB	1650	RGB	441	35	260	1	1.5	0.0052
E-131-441-W	3600	White	441	35	260	1	1.5	0.0052
E-131-441-WW	3600	Warm white	441	35	260	1	1.5	0.0052
E-131-630-RGB	2750	RGB	630	42	260	1	1.5	0.0052
E-131-630-W	6000	White	630	42	260	1	1.5	0.0052
E-131-630-WW	6000	Warm white	630	42	260	1	1.5	0.0052
E-131KIT	Installation kit for E-131 LED floor liner pool					1	0.20	0.01
RC-03	Controller and remote controller (5-24 V DC INPUT-OUTPUT 11.66A 140 WATT)					1	0.40	0.0014
RC-04	Amplifier 140 Watt					1	0.20	0.0006

ELECTRICAL EQUIPMENT 04/15

SMALL ABS LED FLAT LIGHT DC



✓ Technical features

- Made of high quality ABS plastic
- 100% waterproof resin-filled underwater lamp
- Size: 130mm x 15mm
- Certification: CE and RoHS compliant
- Protection rating: IP68
- Warranty: 2 years




AMPLIFIER
RC-04



REMOTE CONTROLLER
RC-03

📏 Dimensions



🔍 Models

PRODUCT CODE	LUMEN	COLOR	LED	WATT	Ø mm	PACKING	WEIGHT kg	VOLUME m³
E-132-108-RGB	-	RGB	108	10	130	1	0.9	0.045
E-132-108-W	-	White	108	10	130	1	0.9	0.045
E-132-108-WW	-	Warm white	108	10	130	1	0.9	0.045
E-132KIT	Installation kit for E-132 LED for liner pool					1	0.20	0.01
RC-03	Controller and remote controller (5-24 V DC INPUT-OUTPUT 11.66A 140 WATT)					1	0.40	0.0014
RC-04	Amplifier 140 Watt					1	0.20	0.0006

ELECTRICAL EQUIPMENT 04/16

STAINLESS STEEL LARGE UNDERWATER LIGHT WITH NICHE



E-133 / E-133-L

E-134 / E-134-L




Technical features


- Made completely of AISI-316 stainless steel
- Available with round or conical shaped niche
- Includes 300W, 12V DC bulb and 2.5m (HO7RN-F 2x4) cable
- Chemical/corrosion resistant
- Simple bulb replacement without lowering the water level
- Protection rating: IP68



Dimensions



E-134 / E-134-L



E-133 / E-133-L



Models

STRUCTURE	PRODUCT CODE	NICHE TYPE	DIMENSIONS					PACKING	WEIGHT kg	VOLUME m ³
			A	B	C	D	E			
Concrete	E-133	Conical Stainless Steel	325	300	140	45	152	1	3.30	0.02
	E-134	Round Stainless Steel	300	200	120	222	-	1	3.25	0.02
Liner	E-133-L	Conical Stainless Steel	325	300	140	45	152	1	3.30	0.02
	E-134-L	Round Stainless Steel	300	200	120	222	-	1	3.25	0.02

ELECTRICAL EQUIPMENT 04/17

STAINLESS STEEL ROUND HALOGEN LIGHTS




Technical features

- Made of AISI-316L V4A stainless steel for increased durability
- Includes 3m of cable
- Protection rating: IP68



Dimensions

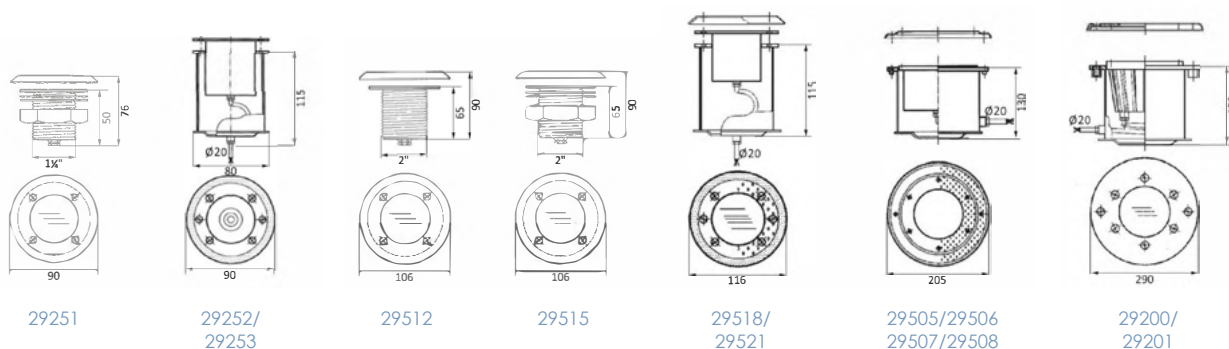

Models

PRODUCT CODE	DESCRIPTION	WATT 12V - AC	LUMEN	PKG	WEIGHT kg	VOLUME m ³
29251	Stainless steel mini light 'Mignon' threaded and ferrule 1 1/4"	20	400	1	2	0.001
29252	Stainless steel mini light 'Mignon' with recess for concrete	20	400	1	4	0.045
29253	Stainless steel mini light 'Mignon' with recess for liner	20	400	1	4.5	0.045
29515	Stainless steel mini light threaded and ferrule 2"	50	1000	1	3	0.045
29518	Stainless steel mini Halogen light with recess for concrete	50	1000	1	4	0.045
29521	Stainless steel mini Halogen light with recess for liner	50	1000	1	4.5	0.045
29505	Stainless steel medium halogen light with recess for concrete	100	2000	1	5	0.055
29507	Stainless steel medium halogen light with recess for liner	100	2000	1	5.5	0.055
29506	Stainless steel medium halogen light with recess for concrete	150	3000	1	5	0.055
29508	Stainless steel medium halogen light with recess for liner	150	3000	1	5.5	0.055
29200	Stainless steel standard halogen light with recess for concrete	300	6000	1	8	0.021
29201	Stainless steel standard halogen light with recess for liner	300	6000	1	9	0.021

ELECTRICAL EQUIPMENT 04/18


STAINLESS STEEL SQUARE HALOGEN LIGHTS



✓ Technical features

- Made of AISI-316L V4A stainless steel for increased durability
- Includes recess for concrete or liner pools and 3m of cable
- Protection rating: IP68

📏 Dimensions

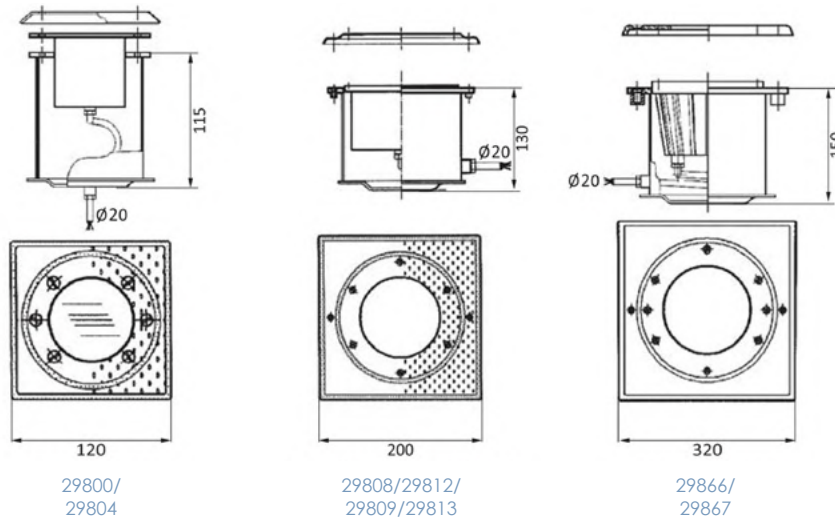

🔍 Models

PRODUCT CODE	DESCRIPTION	WATT 12V - AC	LUMEN	PKG	WEIGHT kg	VOLUME m ³
29800	Stainless steel mini halogen light with recess for concrete	50	1000	1	4	0.045
29804	Stainless steel mini halogen light with recess for liner	50	1000	1	4.5	0.045
29808	Stainless steel medium halogen light with recess for concrete	100	2000	1	5	0.055
29812	Stainless steel medium halogen light with recess for liner	100	2000	1	5.5	0.055
29809	Stainless steel medium halogen light with recess for concrete	150	3000	1	5	0.055
29813	Stainless steel medium halogen light with recess for liner	150	3000	1	5.5	0.055
29866	Stainless steel standard halogen light with recess for concrete	300	6000	1	8	0.021
29867	Stainless steel standard Halogen light with recess for liner	300	6000	1	9	0.021

ELECTRICAL EQUIPMENT 04/19

RECESSED SPOT LED POOL LIGHT AC/DC




✓ Technical features

- Material: stainless steel 316
- Available in white, warm white or RGB colours
- Protection rating: IP68
- Frequency (Hz) : 50 ~60 Hz
- Cable size : VDE 2.5 m
- Working temperature (°C) : -20° ~ + 45°



POWER SUPPLY &
DIMMING CONTROLLER RC-13

📏 Dimensions

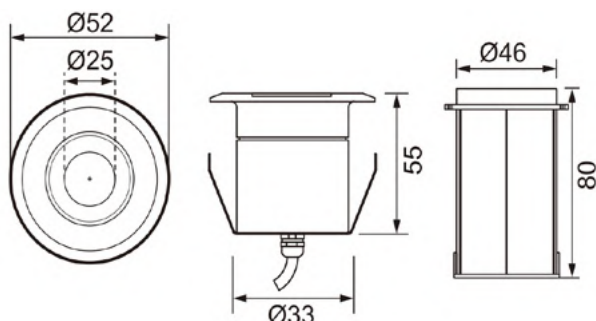

🔍 Models

PRODUCT CODE	LUMEN	WATT	VOLTAGE	COLOR	BEAN ANGLE	PACKING	WEIGHT kg	VOLUME m³
28870-W	189	3	12VAC	W	45°	1	0.4	0.00064
28870-WW	204	3	12VAC	WW	45°	1	0.4	0.00064
28870-W-DC	189	3	12VDC	W	45°	1	0.4	0.00064
28870-WW-DC	204	3	12VDC	WW	45°	1	0.4	0.00064
RC-13	Power supply and Dimming controller DC lights white / warm white (220V AC INPUT - OUTPUT 12V DC 100 WATT)					1	0.4	0.001

ELECTRICAL EQUIPMENT 04/20

RECESSED LED POOL LIGHT AC/DC



✓ Technical features

- Material: stainless steel AISI-316
- Available in white, warm white or RGB colours
- Protection rating: IP68



RC-11 REMOTE CONTROL & CONTROLLER



RC-12 REMOTE CONTROL & CONTROLLER



REMOTE CONTROLLER RC-03




AMPLIFIER RC-04


📏 Dimensions






AQ-027S-W-WW-RGB



AQ-028S-W-WW-RGB



AQ-029S-W-WW-RGB



🔍 Models

PRODUCT CODE	LUMEN	WATT	VOLTAGE	COLOR	BEAM ANGLE	DIMENSIONS mm				PACKING	WEIGHT kg	VOLUME m³
						A	B	C	D			
AQ-027S-W	456	5	12VAC	W	120°	110	52	58	73	1	0.85	0.001
AQ-027S-WW	377	5	12VAC	WW	120°	110	52	58	73	1	0.85	0.001
AQ-027S-RGB	298	5	12VAC	RGB	120°	110	52	58	73	1	0.85	0.001
AQ-028S-W	1004	10	12VAC	W	120°	160	96	62	120	1	1.5	0.003
AQ-028S-WW	720	10	12VAC	WW	120°	160	96	62	120	1	1.5	0.003
AQ-028S-RGB	338	10	12VAC	RGB	120°	160	96	62	120	1	1.5	0.003
AQ-029S-W	1405	15	12VAC	W	120°	190	122	66	148	1	2	0.004
AQ-029S-WW	1108	15	12VAC	WW	120°	190	122	66	148	1	2	0.004
AQ-029S-RGB	381	15	12VAC	RGB	120°	190	122	66	148	1	2	0.004
RC-11	Controller and remote control (Input/output 220V-240V AC 600 WATT)									1	0.20	0.0009
RC-12	Wifi controller and remote control (Input/output 220V-240V AC 600 WATT)									1	0.20	0.0009

Models (Cont'd)

PRODUCT CODE	Lumen	WATT	VOLTAGE	COLOR	Beam angle	DIMENSIONS mm				PACKING	WEIGHT kg	VOLUME m ³
						A	B	C	D			
AQ-027S-W-DC	456	5	12VDC	W	120°	110	52	58	73	1	0.85	0.001
AQ-027S-WW-DC	377	5	12VDC	WW	120°	110	52	58	73	1	0.85	0.001
AQ-027S-RGB-DC	298	5	12VDC	RGB	120°	110	52	58	73	1	0.85	0.001
AQ-028S-W-DC	1004	10	12VDC	W	120°	160	96	62	120	1	1.5	0.003
AQ-028S-WW-DC	720	10	12VDC	WW	120°	160	96	62	120	1	1.5	0.003
AQ-028S-RGB-DC	338	10	12VDC	RGB	120°	160	96	62	120	1	1.5	0.003
AQ-029S-W-DC	1405	15	12VDC	W	120°	190	122	66	148	1	2	0.004
AQ-029S-WW-DC	1108	15	12VDC	WW	120°	190	122	66	148	1	2	0.004
AQ-029S-RGB-DC	381	15	12VDC	RGB	120°	190	122	66	148	1	2	0.004
RC-03	Controller and remote controller (5-24 V DC INPUT-OUTPUT 11.66A 140 WATT)									1	0.40	0.0014
RC-04	AMPLIFIER 140 WATT									1	0.20	0.0006



RED



GREEN



BLUE



WHITE



WARM WHITE



Your global partner since 1974. Trusted for superior quality and exceptional innovations.



Head Office

AQUA S.p.A
42018 San Martino in Rio, Reggio Emilia
Italy - Via Crotti, 1
P : +39 0522 695805/85 - F : +39 0522 646160
aqua@aqua.it | www.aqua.it

AQUA S.p.A - POOL DIVISION
46043 Castiglione d. Stiviere, Mantova - Italy
P : +39 0376 671973 - F : +39 0376 940139
infopools@aqua.it | www.aqua.it



Branches

AQUA WATER SYSTEMS LTD
Unit 135 Oak Drive Hartlebury Trading Estate,
Worcestershire, DY10 4JB
P : +44 (0)1299 251050, F : +44 (0)1299 253704
sales@askaqua.co.uk | www.askaqua.co.uk

AQUA FILTRACION S.A.
Pol. Ind. Castellbisbal Sud 08755
Castellbisbal, Barcelona
P : +34 (0)93 7711855, F : +34 (0)93 7711772
info@aqua.es | www.aqua.es

AQUA SU ARITIMI SAN. VE MUH. TIC. LTD. STI.
Ferhatpasa Mahallesi Maresal Fevzi Cakmak
Cad. No:45 Pk.34888 Atasehir / Istanbul - Turkey
P : +90 216 661 60 60, F : +90 216 661 68 50
info@aqua.com.tr | www.aqua.com.tr

AQUA MIDDLE EAST FZC
1J-07/4 and 1J-07/3 - Hamriyah Free Zone
P.O.Box 42585 Sharjah - United Arab Emirates
P : +971 6 526 0563, F : +971 6 526 0564
contact@aqua-me.ae
www.aqua-me.ae

AQUA WATER SYSTEMS INDIA PVT LTD
4A/4B/4C-Puttappa Industrial Estate
Mahadevapura Post, White Field Road,
Bangalore 560 048
P : 0091 80 4152 1313, F : 0091 80 4152 1414
contact@aquaindia.in | sales@aquaindia.in
www.aquaindia.in

AQUA GROUP RUS

Juridical Address:
107014, Egerskaya str, 1, Moscow, Russia
Residence Address:
127081, Chermianskaya str, 3, Moscow, Russia
P : +7 495 6458078, F : +7 495 969 2413
mail@aqua-italy.ru | www.aqua-italy.ru
www.aqua.it

AQUA GROUP LLC

Office : Regus - Sarayat EL Maadi, Egypt
Management & Warehouse : Plot no 2-2nd service
axe, 2nd Industrial Zone, October, Egypt
P : +20 2 3820 2259 | info@aqua.eg

ELECTRICAL EQUIPMENT 04/21


RECESSED LED POOL LIGHT WITH ALUMINIUM REFLECTOR AC/DC

AQ-006K/AQ-007K



Technical features

- Material: 316 / 304 stainless steel with aluminium anodized reflector
- Wire VDE Certification
- Working temperature: AQ-006K (1-20°C – 48°C), AQ-007K (1-20°C – 42°C)
- Protection rating: IP68



RC-11
REMOTE CONTROL
& CONTROLLER



RC-12
REMOTE CONTROL
& CONTROLLER






REMOTE CONTROLLER
RC-03



AMPLIFIER
RC-04

Dimensions



Models

PRODUCT CODE	LUMEN	WATT	VOLTAGE	COLOR	BEAN ANGLE	DIMENSIONS mm				PACKING	WEIGHT kg	VOLUME m³
						A	B	C	D			
AQ-006K-W	2258	35	12VAC	W	60°	195	105	56	157	1	1.7	0.005
AQ-006K-WW	1702	35	12VAC	WW	60°	195	105	56	157	1	1.7	0.005
AQ-006K-RGB	441	18	12VAC	RGB	60°	195	105	56	157	1	1.7	0.005
AQ-007K-W	3209	50	12VAC	W	60°	270	168	64	232	1	3.4	0.010
AQ-007K-WW	2413	50	12VAC	WW	60°	270	168	64	232	1	3.4	0.010
AQ-007K-RGB	671	35	12VAC	RGB	60°	270	168	64	232	1	3.4	0.010
RC-11	Controller and remote control (Input/output 220V-240V AC 600 WATT)									1	0.20	0.0009
RC-12	Wifi controller and remote control (Input/output 220V-240V AC 600 WATT)									1	0.20	0.0009
AQ-006K-W-DC	2258	35	12VDC	W	60°	195	105	56	157	1	1.7	0.005
AQ-006K-WW-DC	1702	35	12VDC	WW	60°	195	105	56	157	1	1.7	0.005
AQ-006K-RGB-DC	441	18	12VDC	RGB	60°	195	105	56	157	1	1.7	0.005
AQ-007K-W-DC	3209	50	12VDC	W	60°	270	168	64	232	1	3.4	0.010
AQ-007K-WW-DC	2413	50	12VDC	WW	60°	270	168	64	232	1	3.4	0.010
AQ-007K-RGB-DC	671	35	12VDC	RGB	60°	270	168	64	232	1	3.4	0.010
RC-03	Controller and remote controller (5-24 V DC INPUT-OUTPUT 11.66A 140 WATT)									1	0.40	0.0014
RC-04	AMPLIFIER 140 WATT									1	0.20	0.0006



RED



GREEN



BLUE



WHITE



WARM WHITE

ELECTRICAL EQUIPMENT 04/22

ULTRA THIN RESIN FILLED WALL MOUNT LED



Technical features

- Material: 316 / 304 Stainless steel
- Wire VDE Certification
- Working Temperature - 20 C ~ 40 C



RC-11
REMOTE CONTROL
& CONTROLLER



RC-12
REMOTE CONTROL
& CONTROLLER




REMOTE
CONTROLLER
RC-03



AMPLIFIER
RC-04

Dimensions

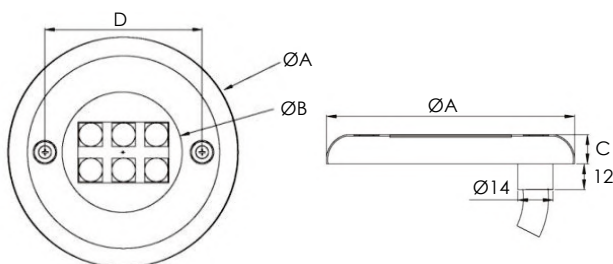


Models

PRODUCT CODE	LUMEN	WATT	VOLTAGE	COLOR	BEAM ANGLE	DIMENSIONS mm				PACKING	WEIGHT kg	VOLUME m³
						A	B	C	D			
AQ-051-W	1607	25	12VAC	W	120°	150	74	18	104	1	1.2	0.0010
AQ-051-WW	1475	25	12VAC	WW	120°	150	74	18	104	1	1.2	0.0019
AQ-051-RGB	813	25	12VAC	RGB	120°	150	74	18	104	1	1.2	0.0019
AQ-052-W	2204	35	12VAC	W	120°	180	94	18	126	1	2	0.0019
AQ-052-WW	2041	35	12VAC	WW	120°	180	94	18	126	1	2	0.0019
AQ-052-RGB	1080	35	12VAC	RGB	120°	180	94	18	126	1	2	0.0019
RC-11	Controller and remote control (Input/output 220V-240V AC 600 WATT)									1	0.20	0.0019
RC-12	Wifi controller and remote control (Input/output 220V-240V AC 600 WATT)									1	0.20	0.0019
AQ-050-W-DC	1441	18	12VDC	W	120°	100	48	12	67	1	0.8	0.0010
AQ-050-WW-DC	1075	18	12VDC	WW	120°	100	48	12	67	1	0.8	0.0010
AQ-050-RGB-DC	704	18	12VDC	RGB	120°	100	48	12	67	1	0.8	0.0010
AQ-051-W-DC	1607	25	12VDC	W	120°	150	74	18	104	1	1.2	0.0019
AQ-051-WW-DC	1475	25	12VDC	WW	120°	150	74	18	104	1	1.2	0.0019
AQ-051-RGB-DC	813	25	12VDC	RGB	120°	150	74	18	104	1	1.2	0.0019
AQ-052-W-DC	2204	35	12VDC	W	120°	180	94	18	126	1	2	0.0019
AQ-052-WW-DC	2041	35	12VDC	WW	120°	180	94	18	126	1	2	0.0019
AQ-052-RGB-DC	1080	35	12VDC	RGB	120°	180	94	18	126	1	2	0.0019
RC-03	Controller and remote controller (5-24 V DC INPUT-OUTPUT 11.66A 140 WATT)									1	0.40	0.0014
RC-04	AMPLIFIER 140 WATT									1	0.20	0.0006

ELECTRICAL EQUIPMENT 04/23

LARGE STAINLESS STEEL LED FLAT LIGHT AC

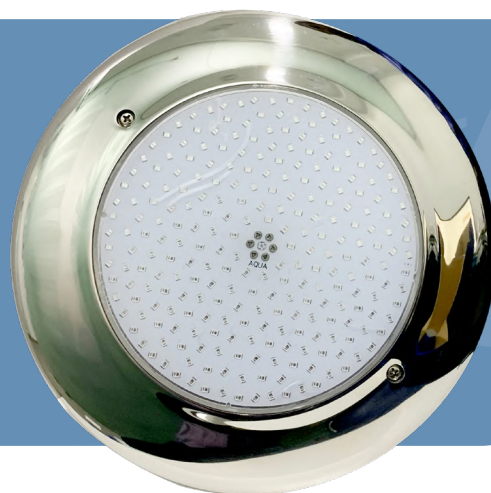


Technical features


- High quality, super bright underwater LED lamps
- Suitable for concrete or liner swimming pools
- Made of stainless steel AISI-316
- Easy to install (Installation kit not included)
- 100% waterproof – lamp filled with epoxy resin
- Acid-proof, alkali-proof and UV resistant
- Low power consumption with long-term stability
- Includes 4m cable length (H07RN-F 2x1.0 2mm)
- Can be installed in PAR56 light housing with additional fixtures
- Protection rating: IP68



Dimensions



RC-11
REMOTE CONTROL
& CONTROLLER



RC-12
REMOTE CONTROL
& CONTROLLER



Models

PRODUCT CODE	LUMEN	COLOR	LED	WATT 12 VAC	Ø mm	PACKING	WEIGHT kg	VOLUME m³
E-108SS-252-RGB	1350	RGB	252	18	260	1	2	0.068
E-108SS-252-W	2100	White	252	21	260	1	2	0.068
E-108SS-252-WW	2100	Warm white	252	21	260	1	2	0.068
E-108SS-531-RGB	1650	RGB	531	33	260	1	2	0.068
E-108SS-531-W	3600	White	531	36	260	1	2	0.068
E-108SS-531-WW	3600	Warm white	531	36	260	1	2	0.068
RC-11	Controller and remote control (Input/output 220V-240V AC 600 WATT)					1	0.2	0.0009
RC-12	Wifi controller and remote control (Input/output 220V-240V AC 600 WATT)					1	0.2	0.0009

ELECTRICAL EQUIPMENT 04/24

SMALL STAINLESS STEEL LED FLAT LIGHT AC




Technical features


- High quality, super bright underwater LED lamps
- Suitable for concrete or liner swimming pools
- Made of stainless steel AISI-316
- Easy to install (Installation kit not included)
- 100% waterproof – lamp filled with epoxy resin
- Acid-proof, alkali-proof and UV resistant
- Low power consumption with long-term stability
- Includes 4m cable length (H07RN-F 2x1.0 2mm)
- Protection rating: IP68



Dimensions



RC-11 REMOTE CONTROL
& CONTROLLER



RC-12 REMOTE CONTROL
& CONTROLLER




Models

PRODUCT CODE	LUMEN	COLOR	LED	WATT 12 VAC	Ø mm	PACKING	WEIGHT kg	VOLUME m³
E-107SS-252-W	2100	White	252	21	152	1	0.96	0.045
E-107SS-252-WW	2100	Warm white	252	21	152	1	0.96	0.045
E-107SS-252-RGB	1350	RGB	252	18	152	1	0.96	0.045
RC-11	Controller and remote control (Input/output 220V-240V AC 600 WATT)						0.2	0.0009
RC-12	Wifi controller and remote control (Input/output 220V-240V AC 600 WATT)						1	0.0009
E-107KIT	Kit for liner Pool						1	0.01

ELECTRICAL EQUIPMENT 04/25

STAINLESS STEEL ULTRA FLAT LED RESIN LIGHT DC

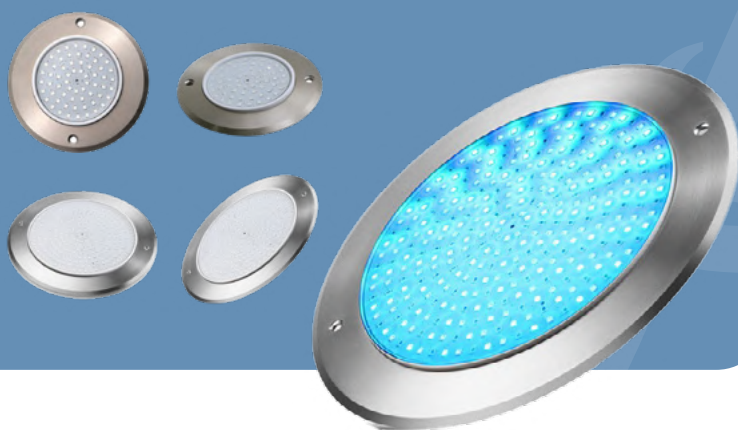


Technical features

- Energy efficient, eco-friendly LED lighting
- Made of stainless steel AISI-316 and polycarbonate
- Long life and safe operation with very little heat
- Ultra thin 8mm thickness
- Available in white, warm white or RGB colours
- Protection rating: IP68



Dimensions



Models

PRODUCT CODE	DESCRIPTION	DIAMETER A mm	LED	LUMEN	SPOT	PACKING	WEIGHT kg	VOLUME m³
E-301-63W	Resin UW light white color	110	63	364	6W-12V DC	1	0.38	0.01372
E-301-63WW	Resin UW light warm white color	110	63	380	6W-12V DC	1	0.38	0.01372
E-301-63RGB	Resin UW light RGB color	110	63	171	6W-12V DC	1	0.38	0.01372
E-301-108W	Resin UW light white color	160	108	561	10W-12V DC	1	0.72	0.02527
E-301-108WW	Resin UW light warm white color	160	108	581	10W-12V DC	1	0.72	0.02527
E-301-108RGB	Resin UW light RGB color	160	108	290	10W-12V DC	1	0.72	0.02527
E-301-252W	Resin UW light white color	230	252	1235	18W-12V DC	1	1.15	0.04732
E-301-252WW	Resin UW light warm white color	230	252	1250	18W-12V DC	1	1.15	0.04732
E-301-252RGB	Resin UW light RGB color	230	252	613	18W-12V DC	1	1.15	0.04732
E-301-333W	Resin UW light white color	230	333	1587	24W-12V DC	1	1.2	0.04732
E-301-333WW	Resin UW light warm white color	230	333	1600	24W-12V DC	1	1.2	0.04732
E-301-333RGB	Resin UW light RGB color	230	333	880	24W-12V DC	1	1.2	0.04732

PRODUCT CODE	DESCRIPTION	DIAMETER A mm	LED	LUMEN	SPOT	PACKING	WEIGHT kg	VOLUME m³
E-301-441W	Resin UW light white color	230	441	2018	35W-12V DC	1	1.2	0.04732
E-301-441WW	Resin UW light warm white color	230	441	2043	35W-12V DC	1	1.2	0.04732
E-301-441RGB	Resin UW light RGB color	230	441	1013	35W-12V DC	1	1.2	0.04732
E-302-252W	Resin UW light white color	280	252	1235	18W-12V DC	1	1.6	0.06727
E-302-252WW	Resin UW light warm white color	280	252	1250	18W-12V DC	1	1.6	0.06727
E-302-252RGB	Resin UW light RGB color	280	252	613	18W-12V DC	1	1.6	0.06727
E-302-333W	Resin UW light white color	280	333	1587	24W-12V DC	1	1.6	0.06727
E-302-333WW	Resin UW light warm white color	280	333	1600	24W-12V DC	1	1.6	0.06727
E-302-333RGB	Resin UW light RGB color	280	333	880	24W-12V DC	1	1.6	0.06727
E-302-441W	Resin UW light white color	280	441	2018	35W-12V DC	1	1.6	0.06727
E-302-441WW	Resin UW light warm white color	280	441	2043	35W-12V DC	1	1.6	0.06727
E-302-441RGB	Resin UW light RGB color	280	441	1013	35W-12V DC	1	1.6	0.06727
RC-03	Controller and remote controller (5-24 V DC INPUT-OUTPUT 11.66A 140 WATT)					1	0.40	0.0014
RC-04	Amplifier 140WATT					1	0.20	0.0006



Your global partner since 1974. Trusted for superior quality and exceptional innovations.



Head Office

AQUA S.p.A
42018 San Martino in Rio, Reggio Emilia
Italy - Via Crotti, 1
P : +39 0522 695805/85 - F : +39 0522 646160
aqua@aqua.it | www.aqua.it

AQUA S.p.A - POOL DIVISION
46043 Castiglione d. Stiviere, Mantova - Italy
P : +39 0376 671973 - F : +39 0376 940139
infopools@aqua.it | www.aqua.it



Branches

AQUA WATER SYSTEMS LTD
Unit 135 Oak Drive Hartlebury Trading Estate,
Worcestershire, DY10 4JB
P : +44 (0)1299 251050, F : +44 (0)1299 253704
sales@askaqua.co.uk | www.askaqua.co.uk

AQUA FILTRACION S.A.
Pol. Ind. Castellbisbal Sud 08755
Castellbisbal, Barcelona
P : +34 (0)93 7711855, F : +34 (0)93 7711772
info@aqua.es | www.aqua.es

AQUA SU ARITIMI SAN. VE MUH. TIC. LTD. STI.
Ferhatpasa Mahallesi Maresal Fevzi Cakmak
Cad. No:45 Pk.34888 Atasehir / Istanbul - Turkey
P : +90 216 661 60 60, F : +90 216 661 68 50
info@aqua.com.tr | www.aqua.com.tr

AQUA MIDDLE EAST FZC
1J-07/4 and 1J-07/3 - Hamriyah Free Zone
P.O.Box 42585 Sharjah - United Arab Emirates
P : +971 6 526 0563, F : +971 6 526 0564
contact@aqua-me.ae
www.aqua-me.ae

AQUA WATER SYSTEMS INDIA PVT LTD
4A/4B/4C-,Puttappa Industrial Estate
Mahadevapura Post, White Field Road,
Bangalore 560 048
P : 0091 80 4152 1313, F : 0091 80 4152 1414
contact@aquaindia.in | sales@aquaindia.in
www.aquaindia.in

AQUA GROUP RUS

Juridical Address:
107014, Egerskaya str, 1, Moscow, Russia
Residence Address:
127081, Chermianskaya str, 3, Moscow, Russia
P : +7 495 6458078, F : +7 495 969 2413
mail@aqua-italy.ru | www.aqua-italy.ru
www.aqua.it

AQUA GROUP LLC

Office : Regus – Sarayat EL Maadi, Egypt
Management & Warehouse : Plot no 2-2nd service
axe, 2nd Industrial Zone, October, Egypt
P : +20 2 3820 2259 | info@aqua.eg

ELECTRICAL EQUIPMENT 04/01


AQUA ABS LUXE UNDERWATER LIGHTS



✓ Technical features

- ABS PAR56 lights
- Suitable for both concrete and liner installations
- Includes 12V AC 300W halogen bulb as standard (LED available on request)
- Installation kit includes: Light body, light box with connector, power derivation box (CE approved) with connector, flexible hose protector and 2.5m cable
- Protection rating: IP68

📏 Dimensions

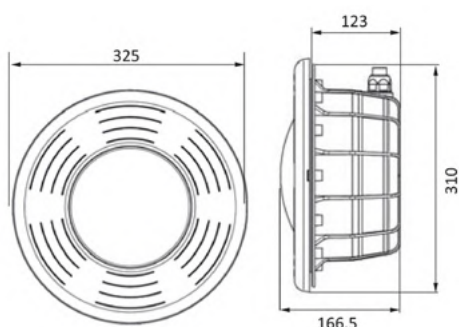

🔍 Models

STRUCTURE	PRODUCT CODE	DESCRIPTION	LUMEN	POWER	PACKING	WEIGHT kg	VOLUME m³
Concrete	200300002	Par56 under water Halogen light complete with installation kit	4000	300W - 12V AC	1	4.5	0.035
Liner	200300001	Par56 under water Halogen light complete with installation kit	4000	300W - 12V AC	1	4.5	0.035
	SSRIM04	Stainless steel AISI316L V4A rim			1	0.6	0.01

NOTE: Codes listed above are for white products. For other colours, add the following letters to the end of the code: Sand +SA, Silver +SL, Grey +GR, Black +BK.



SAND
RAL1015



SILVER
RAL7040



GREY
RAL7043



BLACK
RAL9004

ELECTRICAL EQUIPMENT 04/02

ABS UNDERWATER LIGHTS




Technical features

- Top quality ABS thermoplastic polymer
- Corrosion and UV resistant
- Stainless steel fixing claws for stronger grip and longer life
- Niche with back thread (3/4") with an optional marked hole for rear connection
- Includes 2.5m soft, water-tight cable, gland and a corrugated tube (1m)
- Available with brass inserts or self threading
- Sandwich seals for panel pools
- Various colour options available
- CE approved
- Protection rating: IP68



Dimensions

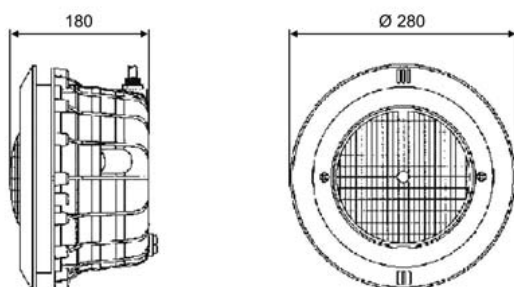

Models

PRODUCT CODE	DESCRIPTION	POWER	LUMEN	PACKING	WEIGHT kg	VOLUME m ³
E-101	ABS Underwater light round concrete	300W - 12V - AC	4000	1	2.70	0.015
E-105	ABS Underwater light round liner	300W - 12V - AC	4000	1	2.70	0.015
SSRIM03	Stainless steel AISI 316L V4A Rim			1	0.60	0.01

ELECTRICAL EQUIPMENT 04/03

UNDERWATER LED BULBS & REMOTE PAR 56AC



✓ Technical features

- Waterproof lamp in AISI-316 stainless steel case
- Heat diffusing ring in AISI-316 stainless steel
- Energy efficient PAR56 LED Bulb
- Multiple colour options



RC-02 REMOTE CONTROL
& CONTROLLER

🔍 Models

PRODUCT CODE	COLOR	LED	LUMEN	POWER	VOLTAGE	PACKING	WEIGHT kg	VOLUME m³
E-120-252-W	White	252	1400	18 W	12 V AC	1	1.1	0.006
E-120-252-WW	Warm white	252	1400	18 W	12 V AC	1	1.1	0.006
E-120-252-RGB	RGB	252	600	18 W	12 V AC	1	1.1	0.006
E-120-333-W	White	333	1800	24 W	12 V AC	1	1.1	0.006
E-120-333-WW	Warm white	333	1800	24 W	12 V AC	1	1.1	0.006
E-120-333-RGB	RGB	333	820	24 W	12 V AC	1	1.1	0.006
E-120-441-W	White	441	2200	35 W	12 V AC	1	1.1	0.006
E-120-441-WW	Warm white	441	2200	35 W	12 V AC	1	1.1	0.006
E-120-441-RGB	RGB	441	1022	35 W	12 V AC	1	1.1	0.006
RC-02	Controller and remote controller (220V AC INPUT-OUTPUT 220V 1000 WATT)					1	0.1	0.0001

ELECTRICAL EQUIPMENT 04/04

UNDERWATER LED BULBS & REMOTE PAR 56DC



✓ Technical features

- Waterproof lamp in AISI-316 stainless steel case
- Heat diffusing ring in AISI-316 stainless steel
- Energy efficient PAR56 LED Bulb
- Multiple colour options



AMPLIFIER
RC-04



REMOTE
CONTROLLER RC-03

🔍 Models

PRODUCT CODE	COLOR	LED	LUMEN	WATTS	VOLTAGE	PACKING	WEIGHT kg	VOLUME m³
E-124-252-W	White	252	1400	18 W	12 V DC	1	1.1	0.006
E-124-252-WW	Warm white	252	1400	18 W	12 V DC	1	1.1	0.006
E-124-252-RGB	RGB	252	600	18 W	12 V DC	1	1.1	0.006
E-124-333-W	White	333	1800	24 W	12 V DC	1	1.1	0.006
E-124-333-WW	Warm white	333	1800	24 W	12 V DC	1	1.1	0.006
E-124-333-RGB	RGB	333	820	24 W	12 V DC	1	1.1	0.006
E-126-441-W	White	441	2200	35 W	12 V DC	1	1.1	0.006
E-126-441-WW	Warm white	441	2200	35 W	12 V DC	1	1.1	0.006
E-126-441-RGB	RGB	441	1022	35 W	12 V DC	1	1.1	0.006
RC-03 Controller and remote controller (5-24 V DC INPUT-OUTPUT 11.66A 140 WATT)						1	0.40	0.0014
RC-04	Amplifier 140 Watt					1	0.20	0.0006


ELECTRICAL EQUIPMENT 04/05

RESIN UNDERWATER LED BULB PAR 56AC



✓ Technical features


- Waterproof lamp suitable for swimming pools and water features
- Water-proof casing made of special epoxy resin
- Acid-proof, alkali-proof and UV resistant to 60°C
- Energy efficient PAR56 LED Bulb
- Multiple colour options
- Remote control available on request




RC-11
REMOTE CONTROL &
CONTROLLER



RC-12
REMOTE CONTROL
& CONTROLLER



📏 Dimensions

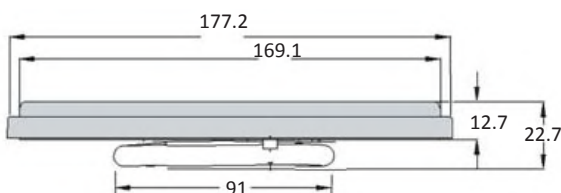

🔍 Models

PRODUCT CODE	COLOR	LED	LUMEN	WATTS	VOLTAGE	PACKING	WEIGHT kg	VOLUME m³
E-129-252-W	White	252	2100	21 W	12 V AC	1	1.1	0.006
E-129-252-WW	Warm white	252	2100	21 W	12 V AC	1	1.1	0.006
E-129-252-RGB	RGB	252	900	18 W	12 V AC	1	1.1	0.006
E-129-531-W	White	531	3600	36 W	12 V AC	1	1.1	0.006
E-129-531-WW	Warm white	531	3600	36 W	12 V AC	1	1.1	0.006
E-129-531-RGB	RGB	531	1650	33 W	12 V AC	1	1.1	0.006
RC-11	Controller and remote control (Input/output 220V-240V AC 600 WATT)					1	0.2	0.0009
RC-12	Wifi controller and remote control (Input/output 220V-240V AC 600 WATT)					1	0.2	0.0009

ELECTRICAL EQUIPMENT | 04/06

RESIN UNDERWATER LED BULB PAR 56DC



✓ Technical features

- Waterproof lamp made from high quality ABS
- Low power consumption with long-term stability
- Voltage: 12V DC
- Remote control and amplifier available on request



AMPLIFIER
RC-04



REMOTE CONTROLLER
RC-03

🔍 Models

PRODUCT CODE	COLOR	LED	LUMEN	WATTS	VOLTAGE	PACKING	WEIGHT kg	VOLUME m ³
E-127-252-W	White	252	1300	18 W	12 V DC	1	1.1	0.006
E-127-252-WW	Warm white	252	1437	18 W	12 V DC	1	1.1	0.006
E-127-252-RGB	RGB	252	515	18 W	12 V DC	1	1.1	0.006
E-127-441-W	White	441	3600	35 W	12 V DC	1	1.1	0.006
E-127-441-WW	Warm white	441	3600	35 W	12 V DC	1	1.1	0.006
E-127-441-RGB	RGB	441	1650	35 W	12 V DC	1	1.1	0.006
E-127-630-W	White	630	2049	42 W	12 V DC	1	1.1	0.006
E-127-630-WW	Warm white	630	2332	42 W	12 V DC	1	1.1	0.006
E-127-630-RGB	RGB	630	1331	42 W	12 V DC	1	1.1	0.006
RC-03 Controller and remote controller (5-24 V DC INPUT-OUTPUT 11.66A 140 WATT)						1	0.40	0.0014
RC-04 Amplifier 140 Watt						1	0.20	0.0006

ELECTRICAL EQUIPMENT 04/07

ABS 'MINI DICHHRO' UNDERWATER LIGHT



E-112

SSRIM02



Technical features

- Underwater lamps, ideal for polyester and liner pools or spas
- Made from white UV resistant ABS
- Also available with stainless steel AISI-316L rim
- Simple mechanism to replace bulb
- Protection rating: IP68




E-113

SSRIM01



Dimensions

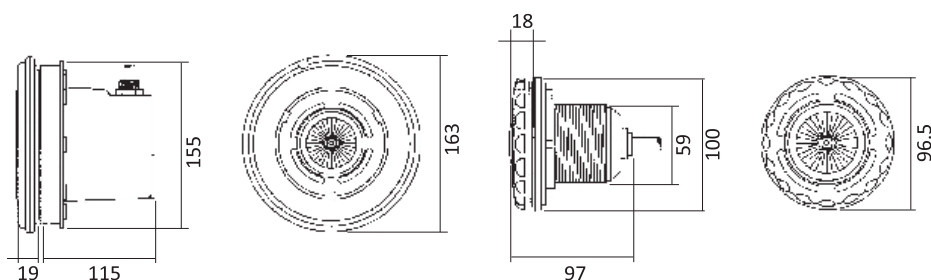

Models


PRODUCT CODE	DESCRIPTION	WATTS	LUMEN	PACKING	WEIGHT kg	VOLUME m ³
E-112	U/W Halogen Light with niche & cable	50W - 12V AC	600	1	5.5	0.022
E-112-L	UWL Halogen Light with niche & cable for Liner	50W - 12V AC	600	1	5.5	0.022
SSRIM02	Stainless Steel AISI 316L V4A Rim	-	-	1	0.3	0.01
E-113	U/W Halogen Light threaded type with cable	50W - 12V AC	600	1	3	0.010
E-113-L	U/W Halogen Light threaded type with cable for Liner	50W - 12V AC	600	1	3	0.010
SSRIM01	Stainless Steel AISI 316L V4A Rim	-	-	1	0.3	0.01

LEONARADO SPOT LAMP AC



Technical features

- Compatible with 50W swimming pool lights
- Impulse colour change using ON/OFF switch on remote control
- Available in 2 models:
 - Leonardo Colour: 8 colour modes, 5W consumption, 120° beam aperture
 - Leonardo White: White mode, 6W consumption, 120° beam aperture



RC-12 REMOTE CONTROL
& CONTROLLER



Models

PRODUCT CODE	DESCRIPTION	WATTS	LUMEN	PACKING	WEIGHT kg	VOLUME m ³
F0037B09	Leonardo spot lamp MR16 LED - Multi color	5W - 12V AC	250	1	0.3	0.01
F0058A08	Leonardo spot lamp MR16 LED - White	5W - 12V AC	250	1	0.3	0.01
F0059A08	Leonardo spot lamp MR16 LED - Warm white	5W - 12V AC	250	1	0.3	0.01
RC-12	Wifi controller and remote control (Input/output 220V-240V AC 600 WATT)			1	0.1	0.0001

LEONARADO SPOT LAMP DC



Technical features

- Compatible with 50W swimming pool lights
- Impulse colour change using ON/OFF switch on remote control
- Available in 2 models:
 - Leonardo Colour: 8 colour modes, 5W consumption, 120° beam aperture
 - Leonardo White: White mode, 6W consumption, 120° beam aperture



AMPLIFIER
RC-04



REMOTE CONTROLLER
RC-03



Models

PRODUCT CODE	DESCRIPTION	WATTS	LUMEN	PACKING	WEIGHT kg	VOLUME m ³
F0037B09-DC	Leonardo spot lamp MR16 LED - Multi color	10W - 12V DC	250	1	0.3	0.01
F0058A08-DC	Leonardo spot lamp MR16 LED - White	10W - 12V DC	250	1	0.3	0.01
F0059A08-DC	Leonardo spot lamp MR16 LED - Warm white	10W - 12V DC	250	1	0.3	0.01
RC-03	Controller and remote controller (5-24 V DC INPUT- OUTPUT 11.66A 140 WATT)	-	-	1	0.40	0.0014
RC04	Amplifier 140 WATT	-	-	1	0.20	0.0006